

VP300, 3 Port Pilot Operated Poppet - SMC

VP342R-3YO1-02FA


Item no. SMC-VP342R-3YO1-02FA

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: R (External Pilot)
 Pressure Specification: Standard (0.7 MPa) Coil Specification:
 Standard Rated Voltage: 3 (110V AC to 120V AC 50/60Hz)
 Electrical Entry: YO [DIN terminal, Without connector
 (EN175301-803)] Light and Surge Voltage Suppressor: None
 Manual Override: Non-locking Push Style Port Size: 02 (1/4)
 Thread: F [G (PF)] Actuation: A (Normally Closed) Option: None
 Made to Order: None

TECHNICAL DATA

Norm	EN 175301-803
Weight	0.1 kg
Zolltarifnummer	84812090

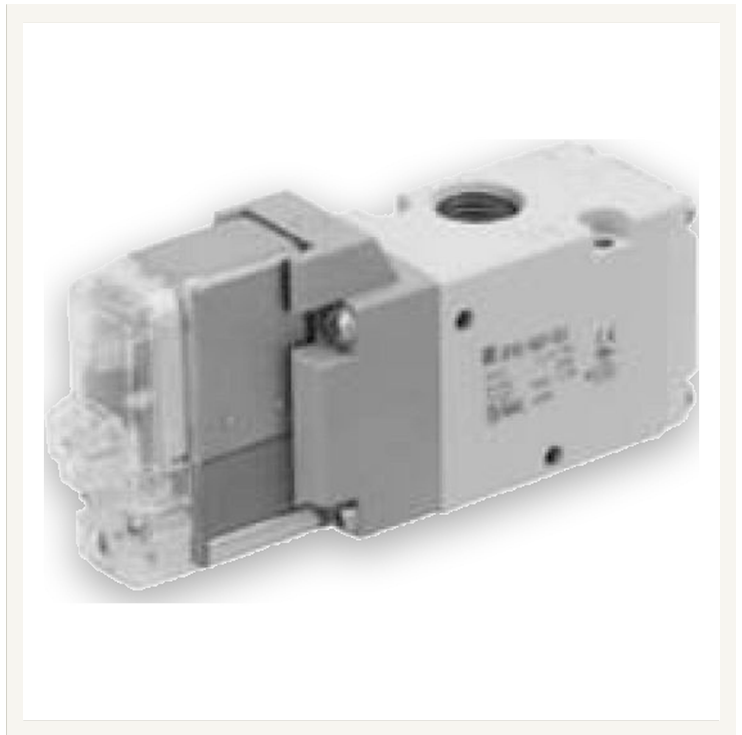

STANDARDS & COMPLIANCE

EN175301-803

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.