


VP300, 3 Port Pilot Operated Poppet - SMC VP342R-5DU1-01A-F

Item no. SMC-VP342R-5DU1-01A-F**Manufacturer SMC**

Body Style: 2 (Body Ported) Valve Option: R (External Pilot)
Pressure Specification: Standard (0.7 MPa) Coil Specification:
Standard Rated Voltage: 5 (24V DC) Electrical Entry: D (DIN
terminal, With connector) Light and Surge Voltage Suppressor: U
[With light/surge voltage suppressor (Non-polar)] Manual
Override: Non-locking Push Style Port Size: 01 (1/8) Thread: Rc
(PT) Actuation: A (Normally Closed) Option: F (With bracket) Made
to Order: None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

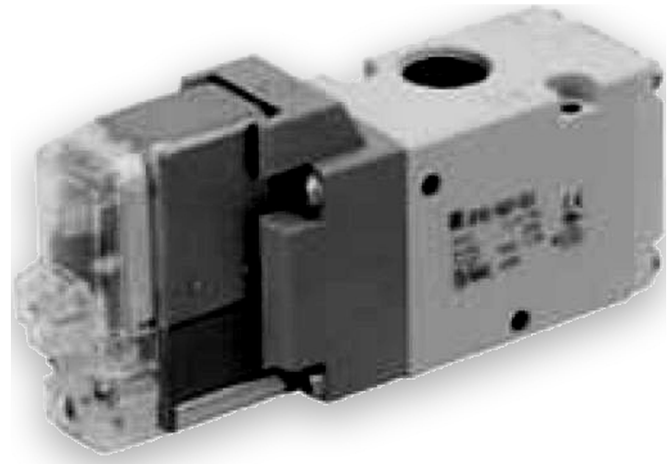

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.