

VP500, 3 Port Pilot Operated Poppet - SMC VP542-4DZD1-03FA


Item no. SMC-VP542-4DZD1-03FA

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: Standard (Internal pilot)
Pressure Specification: Standard (0.7 MPa) Coil Specification:
Standard Rated Voltage: 4 (220V AC 50/60Hz) Electrical Entry: D
(DIN terminal, With connector) Light and Surge Voltage
Suppressor: Z (With light and surge voltage) Manual Override: D
(Push-turn Locking Slotted Type) Port Size: 03 (3/8) Thread: F [G
(PF)] Actuation: A (Normally Closed) Option: None Made to Order:
None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

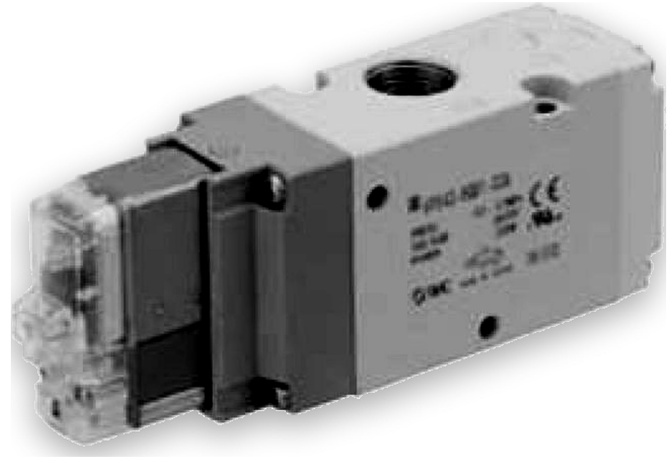

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.