

VP500, 3 Port Pilot Operated Poppet - SMC

VP542-6DD1-03FA


Item no. SMC-VP542-6DD1-03FA

Manufacturer SMC

Body Style: 2 (Body Ported) Valve Option: Standard (Internal pilot)
 Pressure Specification: Standard (0.7 MPa) Coil Specification:
 Standard Rated Voltage: 6 (12V DC) Electrical Entry: D (DIN
 terminal, With connector) Light and Surge Voltage Suppressor:
 None Manual Override: D (Push-turn Locking Slotted Type) Port
 Size: 03 (3/8) Thread: F [G (PF)] Actuation: A (Normally Closed)
 Option: None Made to Order: None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

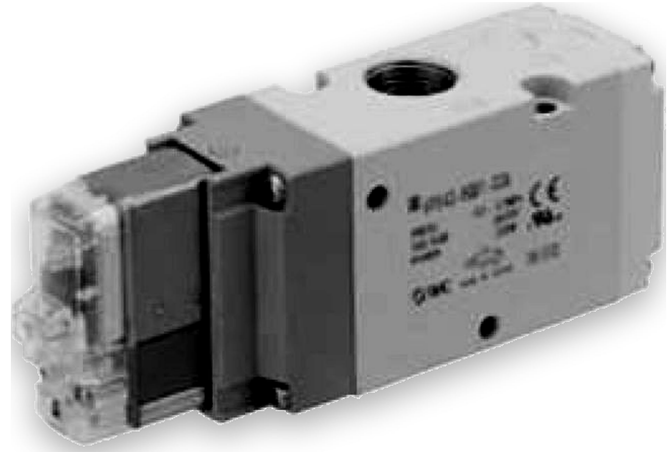

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.