

VP500, 3 Port Pilot Operated Poppet - SMC

VP542R-5YO1-03FB


Item no. SMC-VP542R-5YO1-03FB

Manufacturer SMC

Port Size: 03 (3/8) Actuation: B (Normally Open) Valve Option: R (External Pilot) Coil Specification: Standard Manual Override: Non-locking Push Style Rated Voltage: 5 (24V DC) Thread: F [G (PF)] Made to Order: None Light and Surge Voltage Suppressor: None Electrical Entry: YO [DIN terminal, Without connector (EN175301-803)] Body Style: 2 (Body Ported) Pressure Specification: Standard (0.7 MPa) Option: None

TECHNICAL DATA

Weight	0.1 kg
Zolltarifnummer	84812090

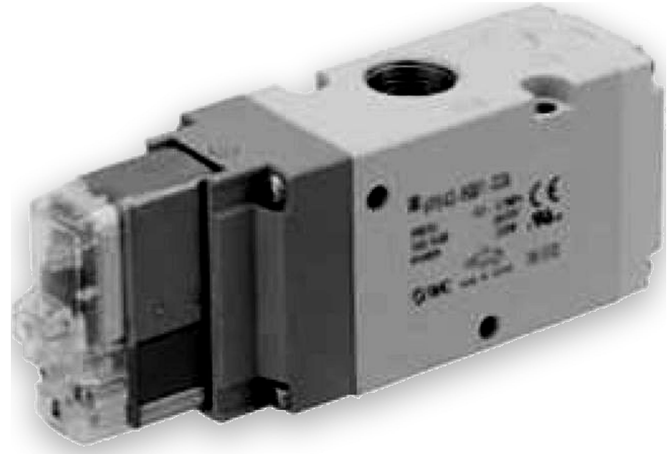

STANDARDS & COMPLIANCE

EN175301-803

DESCRIPTION

High flow capacity: Cv1.0 (VP300), Cv2.3 (VP500), Cv4.0 (VP700). Low power consumption: 1.8W(DC). Possible to use as either selector valve or divider valve. Changeable from normally closed style to normally open style. Vacuum applicable: Up to -101.2kPa.