

Ball valve standard design, yellow steel lever, IT/IT, G 1 1/2 - Riegler 103193

Item no. RGL-103193


Manufacturer Riegler

EAN 4047322277891

Ball valve standard design, yellow steel lever, IT/IT, G 1 1/2

TECHNICAL DATA

Certification	ATEX, IEC 60529
Country of Manufacture	Italy
Material	Nickel-plated brass
Nominal pressure PN [bar]	40
Nominal size DN [mm]	40
Norm	DIN EN 10226, DIN EN ISO 228-1, ISO 5211
Pneumatic connection	G1 1/2
Temperature (max.)	90
Thread	G 1 1/2
Thread standard	DIN EN ISO 228-1
Weight	1.079 kg
Zolltarifnummer	84818081

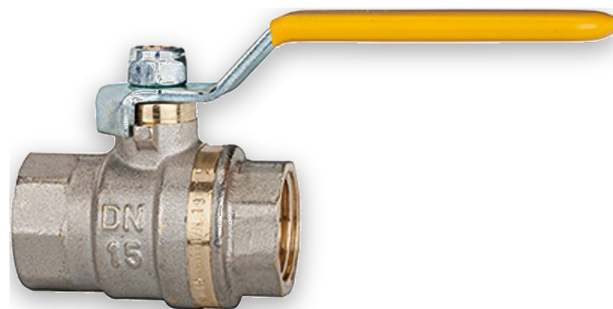

STANDARDS & COMPLIANCE

ISO 228-1 ISO 7-1 DIN EN 10226 ISO 5211 DIN EN 60529

DESCRIPTION

Ball valve standard design, yellow steel lever, IT/IT, nickel-plated brass, Operating temp. -15°C to 90°C, G 1 1/2, PN max 40 bar Applications: Compressed air, water, non-toxic and non-corrosive gases, heating systems, agriculture.

TECHNICAL DATA

Min. operating temperature	-15 °C
Max. operating temperature	90 °C
Material	nickel-plated brass
Thread	G 1 1/2
Ball	chrome-plated brass
Ball seal	PTFE
Stem seal	2 O-rings HNBR/EPDM peroxide crosslinked, sealing ring PTFE
PN	40 bar
Hand lever	steel, with plastic coating

Thread material	bright brass
DN	40 mm
L	91.5 mm
A	130.0 mm
B	69.1 mm
E	14.5 mm
F	14.5 mm

STANDARDS AND ORIGIN

- Standard thread: DIN EN ISO 228-1
- Customs tariff number: 84818081
- Country of origin: IT

ABOUT 2-WAY BALL VALVES

Ball valves shut off a line with a quarter turn and give full bore when open. The range covers nominal sizes from DN 5 to DN 100 and pressure ratings from PN 12 to PN 100, with threads from G 1/4 to G 2 and Rp 1/2 to Rp 1 1/4. Alongside hand-operated versions there are pneumatically and electrically actuated variants.

WHAT MATTERS WHEN CHOOSING

- Nominal size DN 5 to 100 and pressure rating PN 12 to 100: both follow from line size and system pressure.
- Thread type: parallel G threads to DIN EN ISO 228-1 and tapered threads to ISO 7-1 or DIN EN 10226 are both represented. The standard has to match the mating part in the line.
- Actuation: besides hand levers there are pneumatic actuators in double-acting, single-acting spring-to-close and single-acting spring-to-open form, plus electric actuators for 230 V AC / 50 Hz and 24 V DC. Spring-return units move to a defined position if control air is lost.
- Body material: nickel-plated, chrome-plated or bare brass, stainless steel 1.4401 and 1.4408, aluminium and powder-coated aluminium, and the plastics PA and PA6/PC.
- Position feedback: versions are available with microswitch, with inductive switch and with inductive switch in ATEX design.

TYPICAL APPLICATIONS

- Isolating compressed air lines for maintenance and modification work
- Shut-off and changeover points in water and cooling circuits
- Process lines carrying neutral gases and liquids
- Remote isolation using pneumatic or electric actuators
- Shut-off points that report their position back to the higher-level control

Threads follow DIN EN ISO 228-1, DIN EN 10226 or ISO 7-1, mounting plates follow ISO 5211. Depending on version, actuators and switches reach IP 66/67 or IP 68 to DIN EN 60529.

A1-ESD equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com
fluidics-equipment.com

Page 2/2