

Straight hose connection, for hose 4/6 mm, AF 14, PFA - Riegler 110927

Item no. RGL-110927


Manufacturer Riegler

EAN 4047322204743

Straight hose connection, for hose 4/6 mm, AF 14, PFA

TECHNICAL DATA

Country of Manufacture	Germany
For hose ID [mm]	4
For hose OD [mm]	6
Temperatur (max.)	200
Weight	0.007 kg
Werkstoff	Perfluoralkoxy (PFA)
Zolltarifnummer	39174000

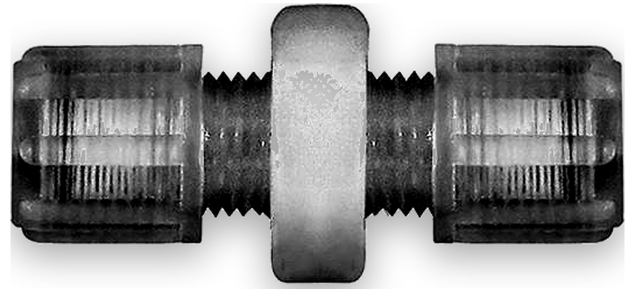

DESCRIPTION

Straight hose connection, for hose 4/6 mm, AF 14, Working pressure max. 10 bar (20 °C)/max. 1 bar (170 °C), PFA Perfluoroalkoxy alkane (PFA): A fluoroplastic with the same chemical resistance as PTFE but much stronger and suitable for temperatures up to 200°C.

TECHNICAL DATA

Min. operating pressure	-0.9 bar
Max. Operating pressure at 20 °C	10 bar
Max. Operating pressure from 170 °C	1 bar
Max. operating temperature	200 °C
Min. operating temperature	-200 °C
for hose I.D.	4
for tube O.D.	6 mm
L1	39.0 mm
a/f	14 mm
Material	perfluoroalkoxy alkane (PFA)

STANDARDS AND ORIGIN

- Customs tariff number: 39174000

A1-ESD equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com
fluidics-equipment.com

- Country of origin: DE