

Poly-Norm 38 GG Hub AR 1.0 D.24H7 keyway DIN 6885/1- JS9 thread - KTR 950383102400


Item no. KTR-950383102400

Manufacturer KTR

Poly-Norm 38 GG Hub AR 1.0 D.24H7 keyway DIN 6885/1-JS9 thread. POLY-NORM is a torsionally flexible, fail-safe shaft coupling from KTR for pump drives.

TECHNICAL DATA

Baureihe	Poly Norm
Bohrung (mm)	24.000000
Country of Manufacture	Germany
Weight	0.954 kg
Werkstoff	Grauguss (GG)
Zolltarifnummer	84839089

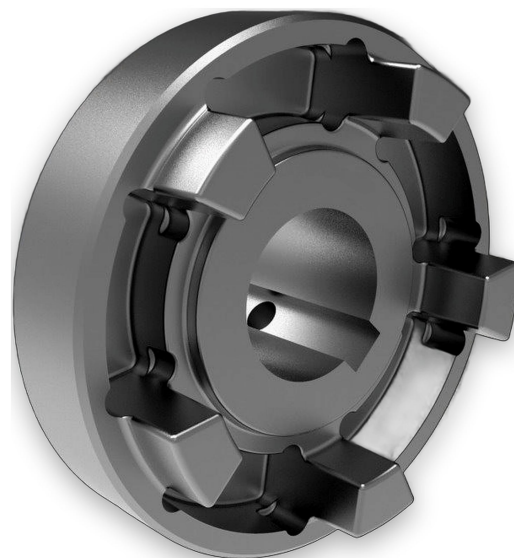

STANDARDS & COMPLIANCE

DIN 6885

DESCRIPTION

POLY-NORM is a torsionally flexible, fail-safe shaft coupling from KTR for pump drives. Torque is transmitted through elastomer cams.

BENEFITS

- Fail-safe through positive-locking cams
- Torsionally flexible with good vibration damping

VERSION

Poly-Norm 38 GG Hub AR 1.0 D.24H7 keyway DIN 6885/1-JS9 thread.

APPLICATIONS

Pump drives and power units requiring damping and fail-safe operation.