

ROTEX 75 Hub steel, bore 75 - KTR 020755007500


Item no. KTR-020755007500

Manufacturer KTR

Coupling hub for the ROTEX 75 jaw coupling in steel, finish-bored to 75 mm. Mounts on the shaft and transmits torque through the spider.

TECHNICAL DATA

Baureihe	ROTEX
Bohrung (mm)	75.000000
Country of Manufacture	Germany
Weight	8.62 kg
Werkstoff	Stahl
Zolltarifnummer	84839089

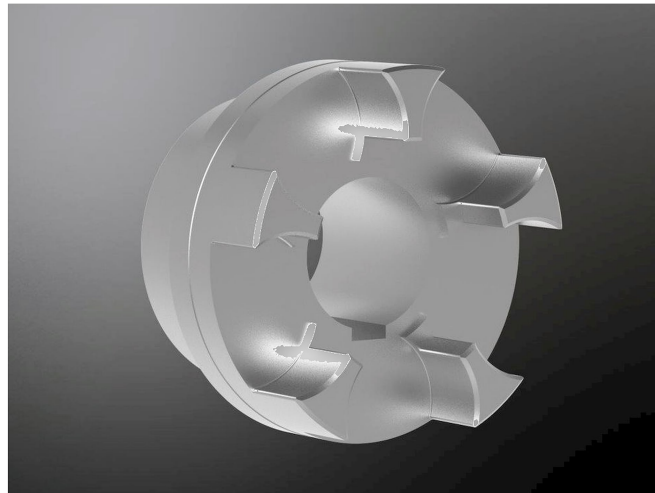

STANDARDS & COMPLIANCE

DIN 6885

DESCRIPTION

ROTEX is a torsionally flexible jaw coupling from KTR. It transmits torque positively through an elastomer spider between two jaw hubs and compensates angular, radial and axial shaft misalignment. If the spider wears, the jaws engage with each other so the coupling stays fail-safe.

BENEFITS

- Sturdy hub for durable torque transmission
- Prepared ready to fit
- Combines with any ROTEX 75 spider

TECHNICAL DATA

- Size: ROTEX 75
- Material: steel
- Bore: 75 mm
- Keyway: DIN 6885/1

A1-ESD equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com
fluidics-equipment.com

Page 1/2

APPLICATIONS

A complete coupling needs two hubs and one spider of size 75.