

ROTEX GS 38 AL-H Spannringnabe D.25H7 for Ausführung 6.0 hartcoatiert- GL - KTR 550387152540


Item no. KTR-550387152540

Manufacturer KTR

ROTEX GS 38 AL-H Spannringnabe D.25H7 for Ausführung 6.0 hartcoatiert-GL. ROTEX GS is a backlash-free torsionally flexible servo coupling from KTR.

TECHNICAL DATA

Baureihe	ROTEX GS
Bohrung (mm)	25.000000
Country of Manufacture	Germany
Weight	0.71 kg
Zolltarifnummer	84839089

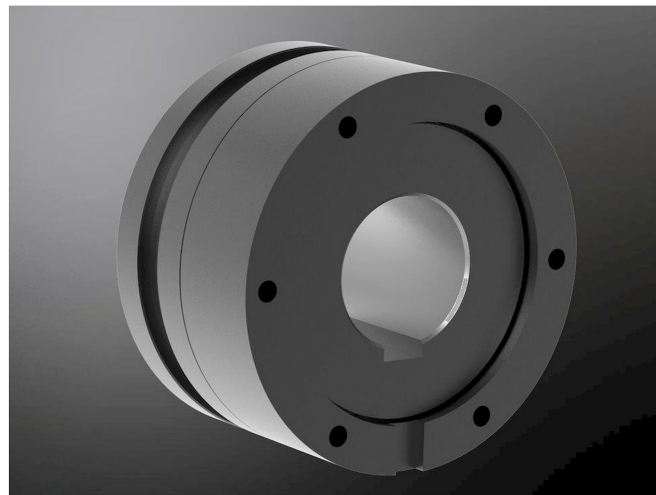

DESCRIPTION

ROTEX GS is a backlash-free torsionally flexible servo coupling from KTR. The spider with convex teeth sits under pre-tension in the concave jaws of the hubs and transmits torque without backlash.

BENEFITS

- Backlash-free torque transmission through the pre-tensioned spider
- Spider in several Shore hardnesses to tune stiffness and damping
- Compensates angular, radial and axial misalignment

VERSION

ROTEX GS 38 AL-H Spannringnabe D.25H7 for Ausführung 6.0 hartcoatiert-GL.

APPLICATIONS

Servo hydraulics, test bench technology and automation requiring backlash-free, precise positioning.