


Connection stroke

Product No.	104421006
Nominal flow Ø DN:	10.4 mm
Connection Stroke:	22.3 mm
Max WP Connected:	35 bar
Min BP Connected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	Hose 5/8" 16,0mm
Sealing material:	NBR
Hexagon:	22

AC	13	1	Back part	Steel, Zn 8 Silver
	11	6	Ball	Stainless steel
	10	1	Locking sleeve	Hard.steel, FeNi5b
	9	1	Spring	Stainless steel
	8	1	Spring	Stainless steel
	7	1	Valve nut	Brass
	6	1	O-ring	NBR
	5	1	Lip Seal	NBR
	4	1	Ratchet sleeve	Brass
	3	1	Valve seat	Brass
	2	1	Valve	Brass
	1	1	Front part	Steel, Chem. Ni.
	Item	Qty	Description	Material

Scale	Drawn	Checked	Appr.	ECO	Date
3 : 1	CABANLA	LHE	JOOL	11916	2018-01-09
			Drawing No. 104421006		Issue C
Assembly Drawing			104421006		Sheet 1 / (1)

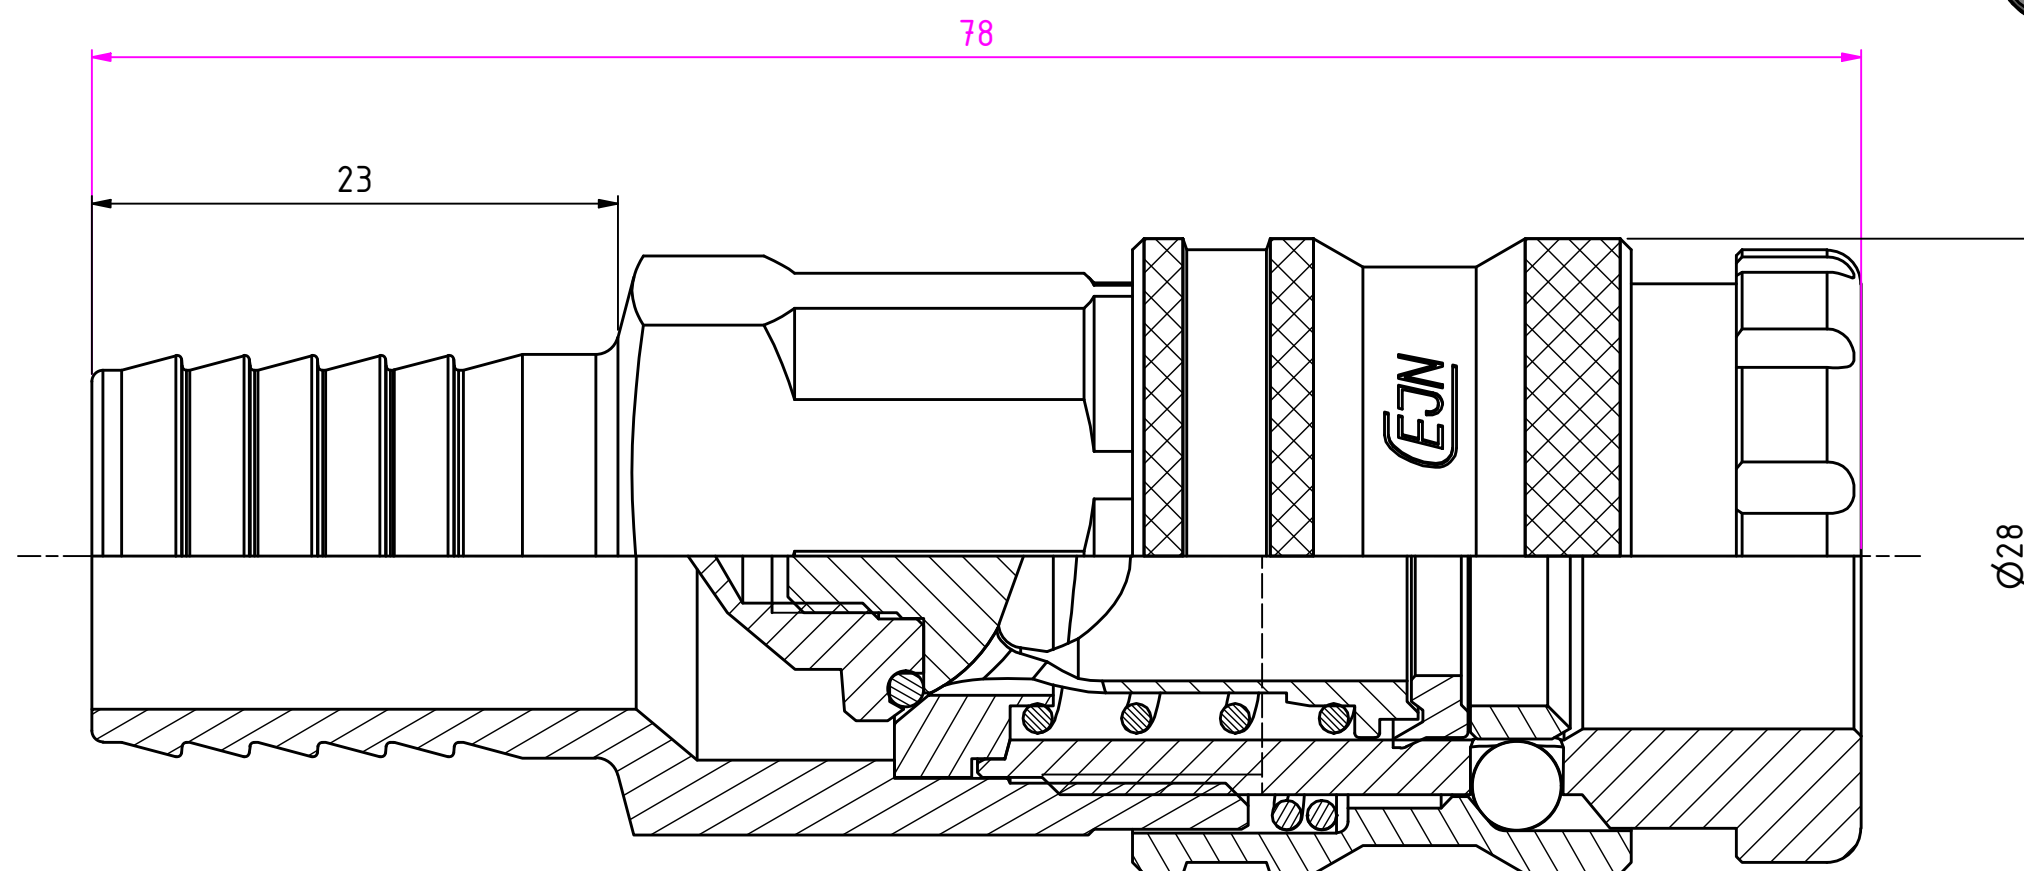

Assembly Drawing	104421006
------------------	-----------

Issue	Sheet
C	1 / (1