

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3



D

C

B

A

Product No. 109441554	
Nominal flow Ø DN:	8 mm
Connection Stroke:	18.8 mm
Max WP Connected:	35 bar
Max WP Disconnected:	35 bar
Min BP Connected:	140 bar
Min BP Disconnected:	140 bar
Temperature range:	-30°C - +100°C
Connection:	M28x1,5 Male
Sealing material:	NBR
Hexagon:	30

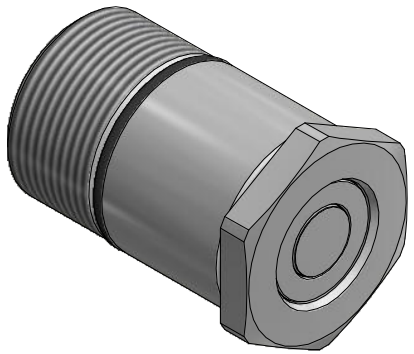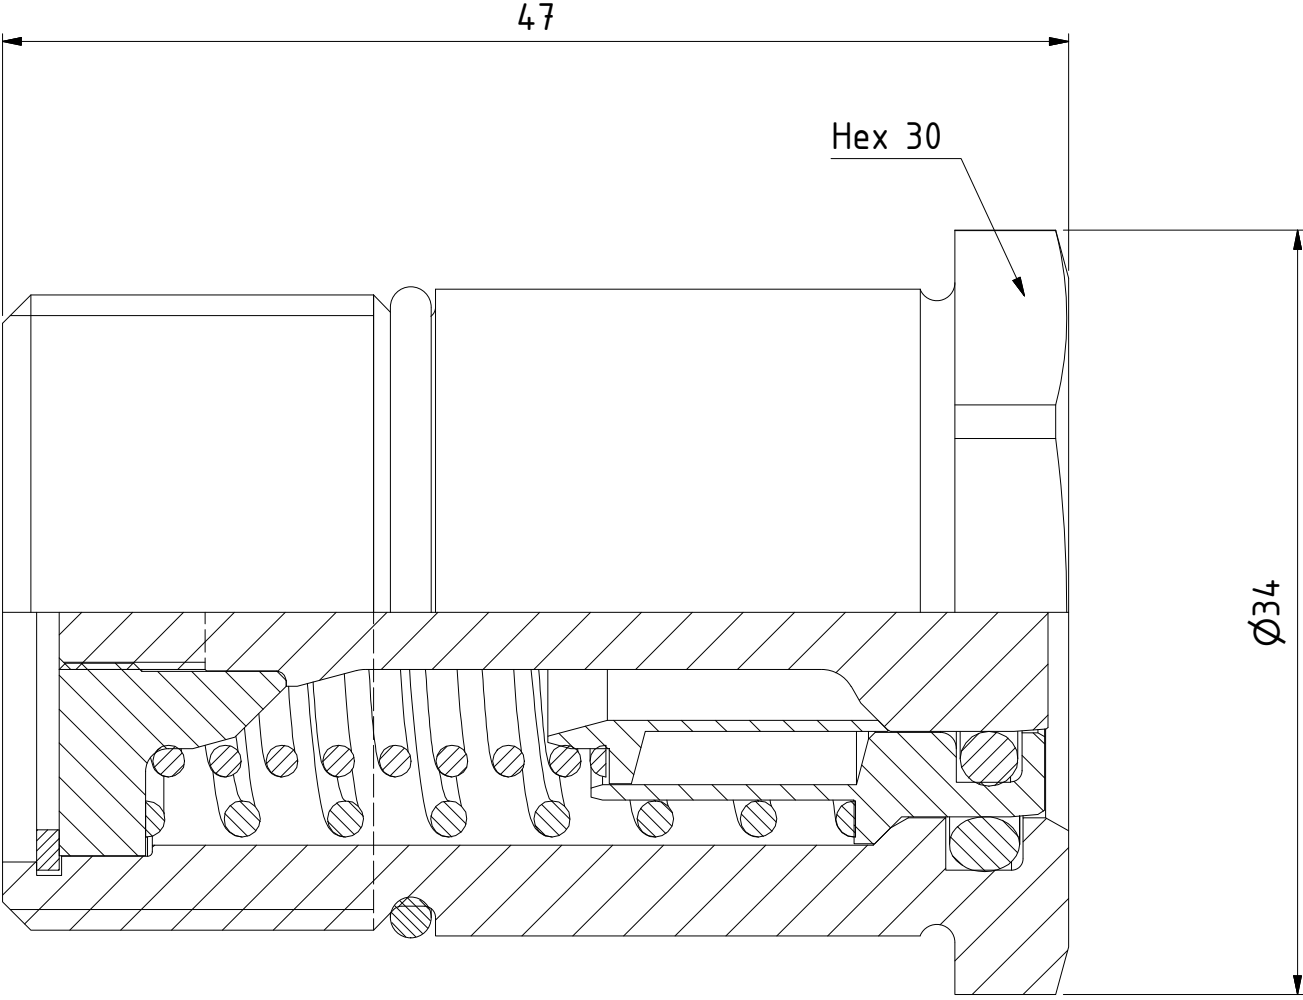

1 : 1

11	1	O-ring	NBR	096162801
10	1	O-ring	NBR	094752800
9	1	O-ring	NBR	099442800
8	1	Valve sleeve	Brass	099445700
7	1	Spring	Stainless steel	099443201
6	1	Spring	Steel	099443200
5	1	Stop for Valve	Brass	099443900
4	1	Lock ring	Stainless steel	099442600
3	1	Valve opener	Brass, CuNi5b	099447000
2	1	Valve	Brass, CuNi5b	099443000
1	1	Coupling body	Brass, CuNi5b	099445450
Item	Qty	Description	Material	Part Number
		Scale 3 : 1	Drawn EP7	Checked
		Appr.		ECO
		Date 2018-01-16		Issue AA
		Sheet 1 /(1)		



Assembly Drawing 509441554