


Product no: 10_985_1559		
Max working pressure:	300	bar connected
	300	bar disconnected
Min burst pressure:	970	bar connected
	970	bar disconnected
Sealing material:	NBR	
Temperatur range:	-20°C - +100 °C	
Nominal flow diameter,DN:	19	mm
Connection	M52*1,5 Male	
Connection stroke:	-	mm



14	1	Valve sleeve	Steel
13	1	Valve opener	Steel, Corr-I-Dur
12	1	Valve	Steel
11	1	Stop for valve	Steel
10	1	Spring	Steel
9	1	Spring	Stainless steel
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Lock ring	Steel
4	1	Coupling body	Steel, Black finished
3	1	Back up ring	PUR
2	1	Back up ring	PTFE
1	1	Back up ring	PTFE
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	2:1	Ritad Drawn	CABJAJ	Kontroll Checked	-	Godkännat Appr.	-	Ändringsnr. Alt. no.	-	Datum Date	130424
	Assembly drawing		Ritningsnr./Drawing No.				50_985_1559		Utg./Issue			AA

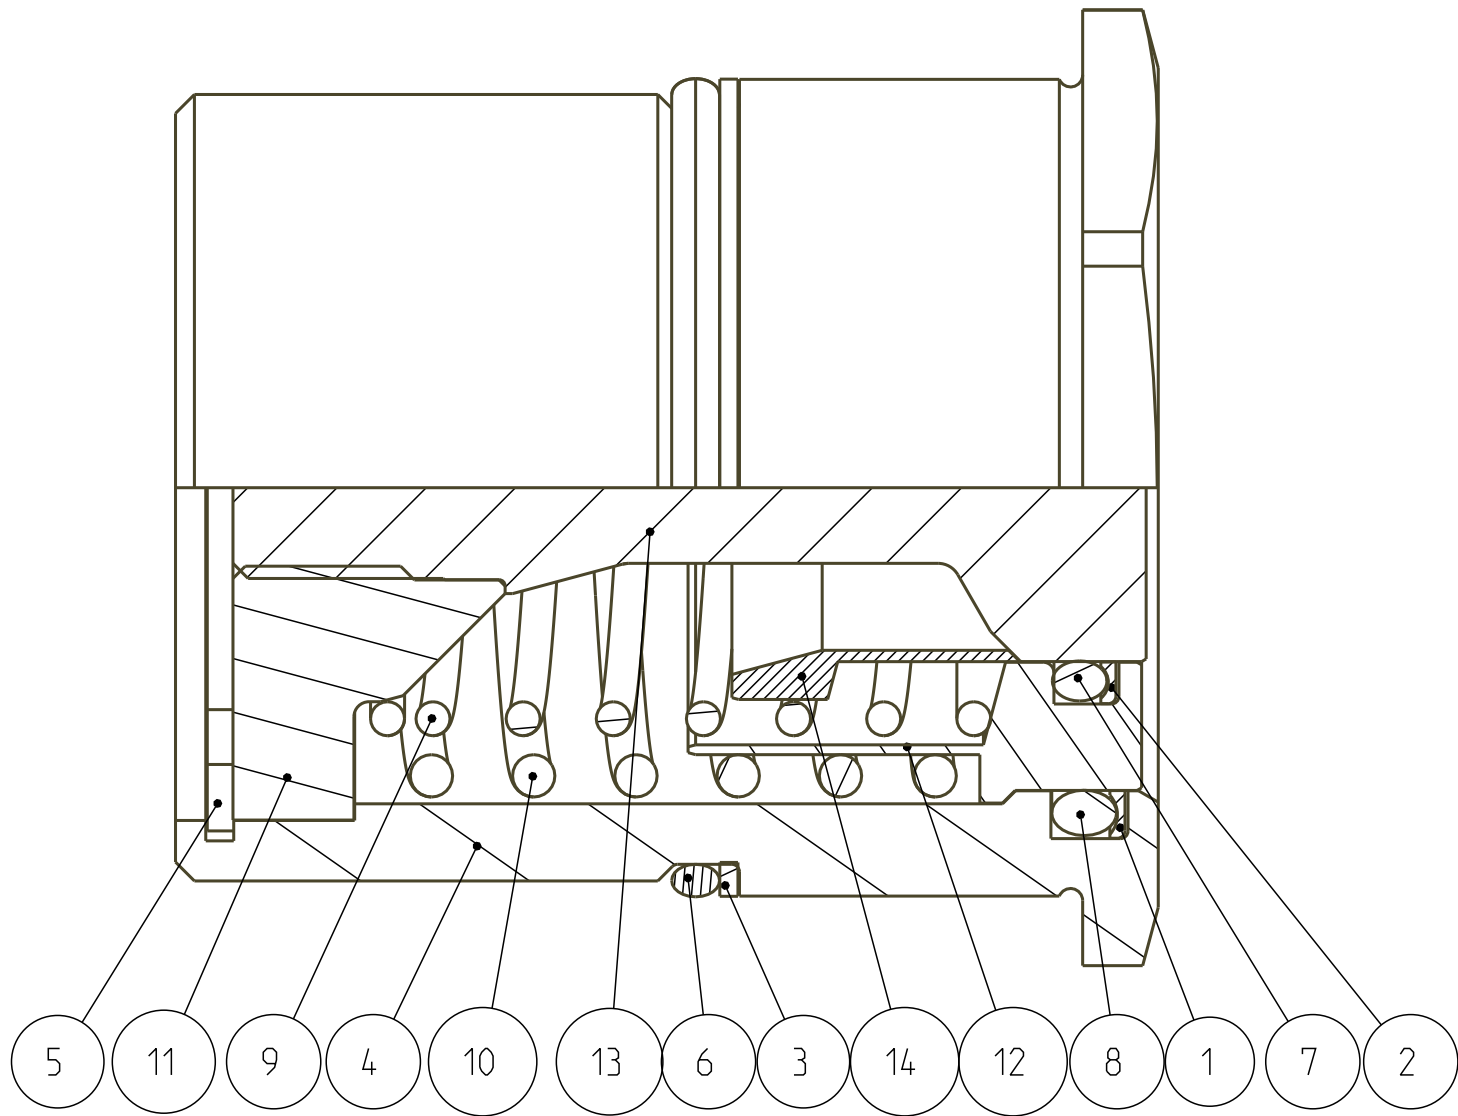

1:1