


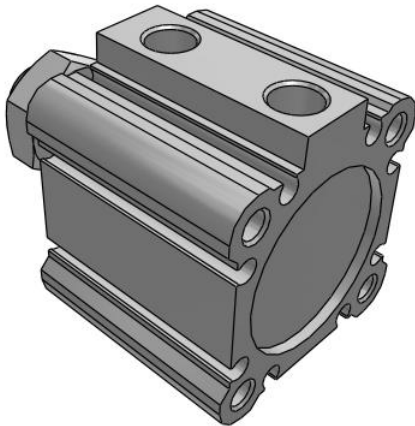

C(D)Q2, Compact Cylinder, Double Acting, Single Rod w/Auto Switch Mounting Groove CQ2A32TF-20DMZ

- Double acting, single rod, compact cylinder
- Bore sizes (mm): 12, 16, 20, 25, 32, 40, 50, 63, 80, 100
- Standard stroke range (mm): 5 to 100
- Port threads: M (12 to 25 bore); Rc, NPT or G (32 to 100 bore)
- Can mount small auto switches on 4 surfaces.

Magnet	None
Mounting	A (Both Ends Tapped)
Type	Standard
Bore Size	Ø32 mm
Port Thread Type	TF
Lube-retainer	Without Stable Lubrication Function
Stroke	20
Body Option	M [Rod End Male Thread]
Auto Switch Groove	None, also for 12-25 Bore w/o Magnet
Mounting Bolt	None
Rod End Bracket	None
Auto Switch	No Switch
Lead Wire or Prewired Connector	Z (5 m)
Number	2 pcs.
Rod End Options	None
Temperature Resistance	None
Low Speed	None
Made of Stainless Steel	None

Fluororubber Seal	None
-	Compressed air

φ32~φ50

— 1 2 3 4 5 6 7 8 9 10 —

※ 1 2 3 4 5 6 7 8 9 10

**標準品として、以下、
CQB-CQCS**



外径φ32mm

内径φ12mm

軸径φ12mm

軸径φ14mm

軸径φ16mm

軸径φ18mm

軸径φ20mm

軸径φ22mm

軸径φ24mm

軸径φ26mm

軸径φ28mm

軸径φ30mm

軸径φ32mm

軸径φ34mm

軸径φ36mm

軸径φ38mm

軸径φ40mm

軸径φ42mm

軸径φ44mm

軸径φ46mm

軸径φ48mm

軸径φ50mm

標準品として、以下、
CQB-CQCS



外径φ32mm

内径φ12mm

軸径φ12mm

軸径φ14mm

軸径φ16mm

軸径φ18mm

軸径φ20mm

軸径φ22mm

軸径φ24mm

軸径φ26mm

軸径φ28mm

軸径φ30mm

軸径φ32mm

軸径φ34mm

軸径φ36mm

軸径φ38mm

軸径φ40mm

軸径φ42mm

軸径φ44mm

軸径φ46mm

軸径φ48mm

軸径φ50mm

標準品として、以下、
CQB-CQCS



外径φ32mm

内径φ12mm

軸径φ12mm

軸径φ14mm

軸径φ16mm

軸径φ18mm

軸径φ20mm

軸径φ22mm

軸径φ24mm

軸径φ26mm

軸径φ28mm

軸径φ30mm

軸径φ32mm

軸径φ34mm

軸径φ36mm

軸径φ38mm

軸径φ40mm

軸径φ42mm

軸径φ44mm

軸径φ46mm

軸径φ48mm

軸径φ50mm

標準品として、以下、
CQB-CQCS



外径φ32mm

内径φ12mm

軸径φ12mm

軸径φ14mm

軸径φ16mm

軸径φ18mm

軸径φ20mm

軸径φ22mm

軸径φ24mm

軸径φ26mm

軸径φ28mm

軸径φ30mm

軸径φ32mm

軸径φ34mm

軸径φ36mm

軸径φ38mm

軸径φ40mm

軸径φ42mm

軸径φ44mm

軸径φ46mm

軸径φ48mm

軸径φ50mm

-
-

CQ2-Z-B_EU.pdf