


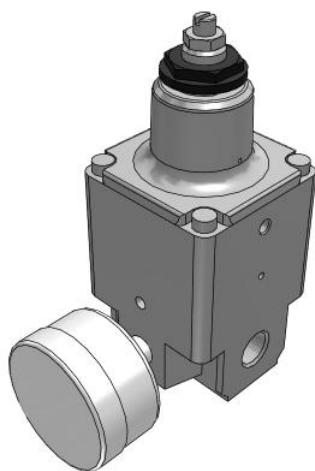


IR1000~3000, Precision Regulator IR2120-F02G

Datasheet

General Series Information

- Precision regulator
- Regulating pressure range (MPa): 0.005 to 0.8 depending on model
- Compact and lightweight
- Bracket & pressure gauge can be mouted on either the front or back
- 2 air operated models




Pressure control valve, relieving pressure
regulator, adjustable

Standard specifications

Body Size	2 (IR2000)
Type of Setting	1 (Air Operated [Series IR2000/IR3000 Only])
Set Pressure	2 (0.01~0.8MPa [IR1000/2000] or 0.01~0.8MPa [IR3000])
Thread	F [G(PF)]
Port Size	02 (1/4 [IR2000/3000])
Accessory	G (Pressure Gauge)
Suffix 1	Standard
Suffix 2	None
Made to Order	None
Switch Specifications	None
-	Air
Maximum operating pressure	1.0 MPa
Minimum operating pressure	+0.1 Mpa
Sensitivity	Within 0.2% of full span
Repeatability	Within 0.5% of full span
Set pressure range	0.01 - 0.8 MPa
Linearity	Within 1% of full span
Air consumption (At supply pressure of 1.0 MPa)	4.4 l/min (ANR) or less


Input signal pressure	0.01 - 0.8 Mpa
Weight	0.300 Kg

Dimensions

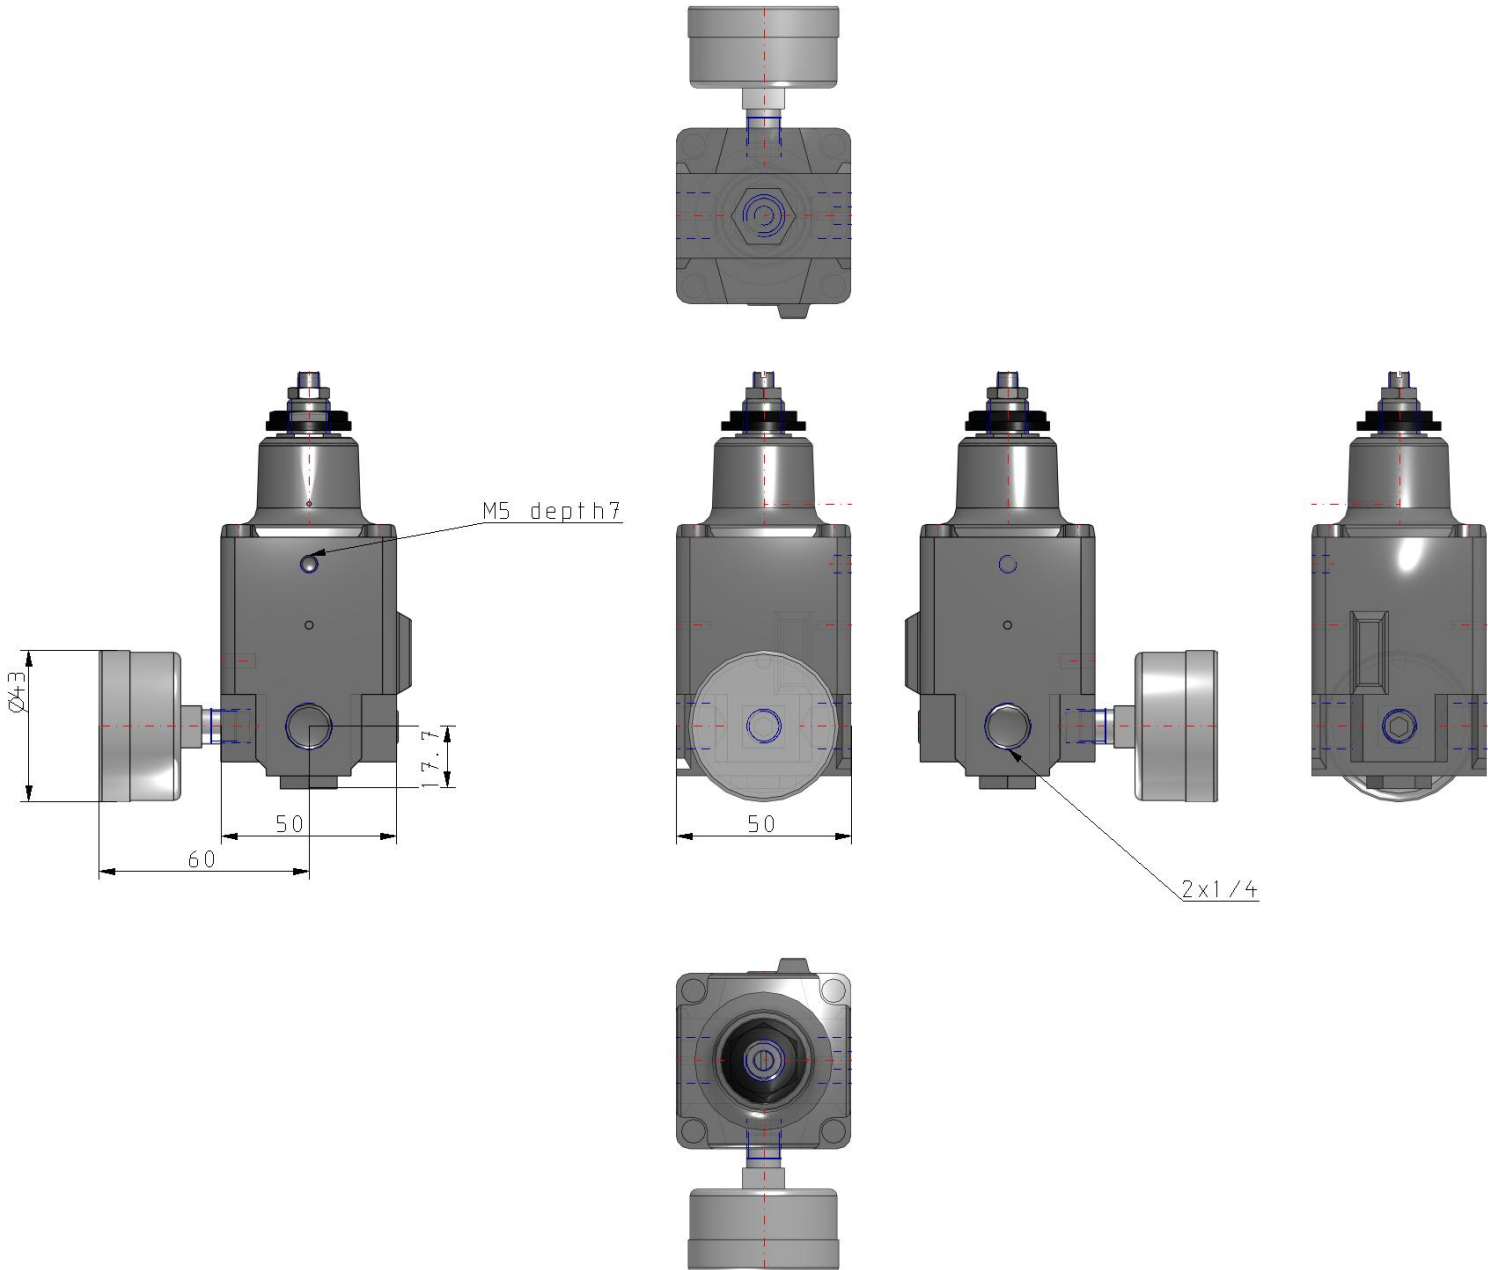

Constructions

Construction

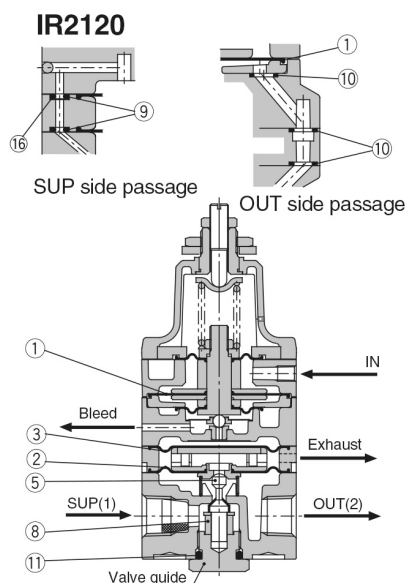

Replacement Parts

No.	Description	Material	IR2120	
			Part no.	Qty.
1	Diaphragm assembly	NBR, other	P362020-13	1
2	Diaphragm assembly	NBR, other	P362020-5	1
3	Diaphragm	NBR, other	P36202019	1
4	Valve	Stainless steel, NBR	—	—
5	Valve	Stainless steel, NBR	P36202068#1	1
6	Valve	Brass, NBR	—	—
7	Valve	Brass, NBR	—	—
8	Damper	NBR, other	P36202026	1
9	O-ring	H-NBR	ø1.42 x 1.52	2
10	O-ring	NBR	ø4.5 x 1	3
11	O-ring	NBR	JISB2401P11	1
12	O-ring	NBR	—	—
13	O-ring	NBR	—	—
14	Seal (A)	NBR	—	—
15	Seal (B)	NBR	—	—
16	Fixed throttle	Stainless steel	P36202018	1
Repair kit no. (A set of above nos. ① to ⑮.)			KT-IR2120	

Additional information

Catalogue [IR1000-2000-3000-B_EU.pdf](#)

Operation manuals [OM_IR30-OM00002EN-F.pdf](#)
[IR10-OM00006_GB.pdf](#)
[OM_IR20-OM00004EN-E.pdf](#)
[OM_IR20_OM00002EN-F.pdf](#)
[OM_IR10_OM00002EN-E.pdf](#)
[OM_IR30_OM00004EN-F.pdf](#)