

## MXQ\*A-Z, Air Slide Table, Double Ported Type MXQ12A-30ZG

Datasheet


### General series information

- More compact: High reduced up to 10%.
- Lighter: Weight reduced up to 35%.
- More flexible: Piping ports and auto switch mounting grooves on both sides.
- Auto switch visibility improved.

### Standard specifications

|                                        |                                                                       |
|----------------------------------------|-----------------------------------------------------------------------|
| Bore Size                              | 12 mm                                                                 |
| Lube-retainer                          | Without Stable Lubrication Function                                   |
| Stroke                                 | 30 mm                                                                 |
| Adjuster Option                        | ZG [Shock Absorber RJ (Extension Stroke End + Retraction Stroke End)] |
| Functional Option                      | Without Functional Option                                             |
| Auto Switch                            | No Switch                                                             |
| Lead Wire or Prewired Connector        | 0.5m (Or None in the Case of No Switch)                               |
| Number                                 | 2 pcs. (Or None in the Case of No Switch)                             |
| Made to Order                          | None                                                                  |
| Pressure medium                        | Compressed air                                                        |
| Maximum temperature of pressure medium | 60 °C                                                                 |
| Minimum temperature of pressure medium | -10 °C                                                                |
| Maximum ambient temperature            | 60 °C                                                                 |
| Minimum ambient temperature            | -10 °C                                                                |
| Number of pneumatic connections        | 2 pcs.                                                                |
| Mode of operation of drive             | Double acting                                                         |
| Weight                                 | 0.346 Kg                                                              |

Dimensions

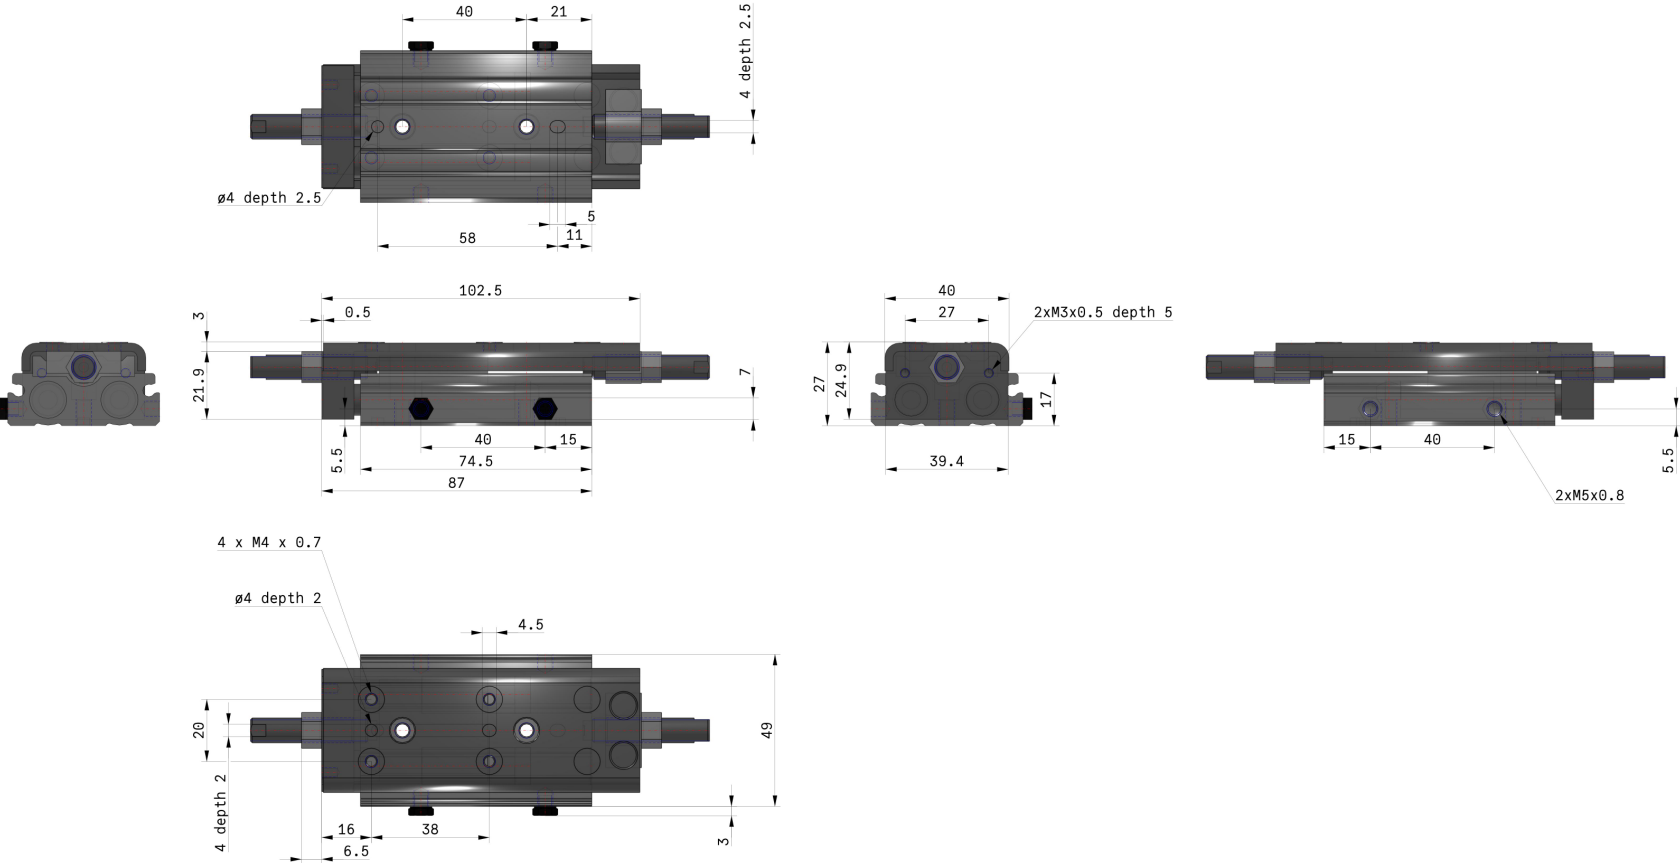

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

## Additional information

Catalogue

[MXQ-Z-C\\_EU.pdf](#)

Operation manuals

[OM\\_MXQ-Z\\_OMP0038EN-D.pdf](#)