


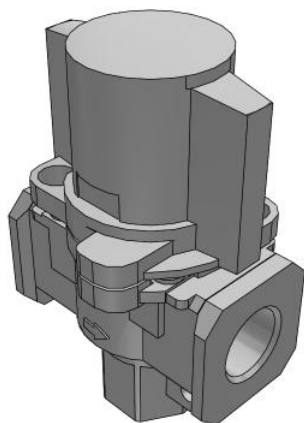

## Single Action - VHS VHS40-04A

### Datasheet

### General series information

- This product is being discontinued and will be replaced by VHS-D series. [Update details here.](#)
- Modular connection type for connecting to FRL units
- Flow rate up to 8270 l/min
- Energy saving: zero air bleeding while switching the handle
- OSHA standard compliant (US standard)
- With built-in silencer for EXH port as an option.




Directional control valve 3/2-way valve, closed normal position With mechanical control spring, with mechanical component detent control Return with general manual control


### Standard specifications

|                             |                                          |
|-----------------------------|------------------------------------------|
| Body Size                   | 40                                       |
| Thread                      | Rc                                       |
| Port Size                   | 04 (1/2)                                 |
| Handle/Bonnet Material      | A (Flame Resistant PBT)                  |
| Options                     | None                                     |
| Semi-Standard               | None                                     |
| Made to Order               | None                                     |
| Pressure medium             | Air; Air                                 |
| Maximum operating pressure  | 1.0 MPa                                  |
| Minimum operating pressure  | 0.01 MPa                                 |
| Proof pressure              | 1.5 MPa                                  |
| Maximum ambient temperature | 60 °C; 60 °C                             |
| Minimum ambient temperature | -5 °C (No freezing); -5 °C (No freezing) |
| Approvals                   | No need; No need                         |
| Paint colour                | Handle: Red<br>Body: White               |
| Handle switching angle      | 90°                                      |

|        |          |
|--------|----------|
| Weight | 0.247 Kg |
|--------|----------|

## Dimensions

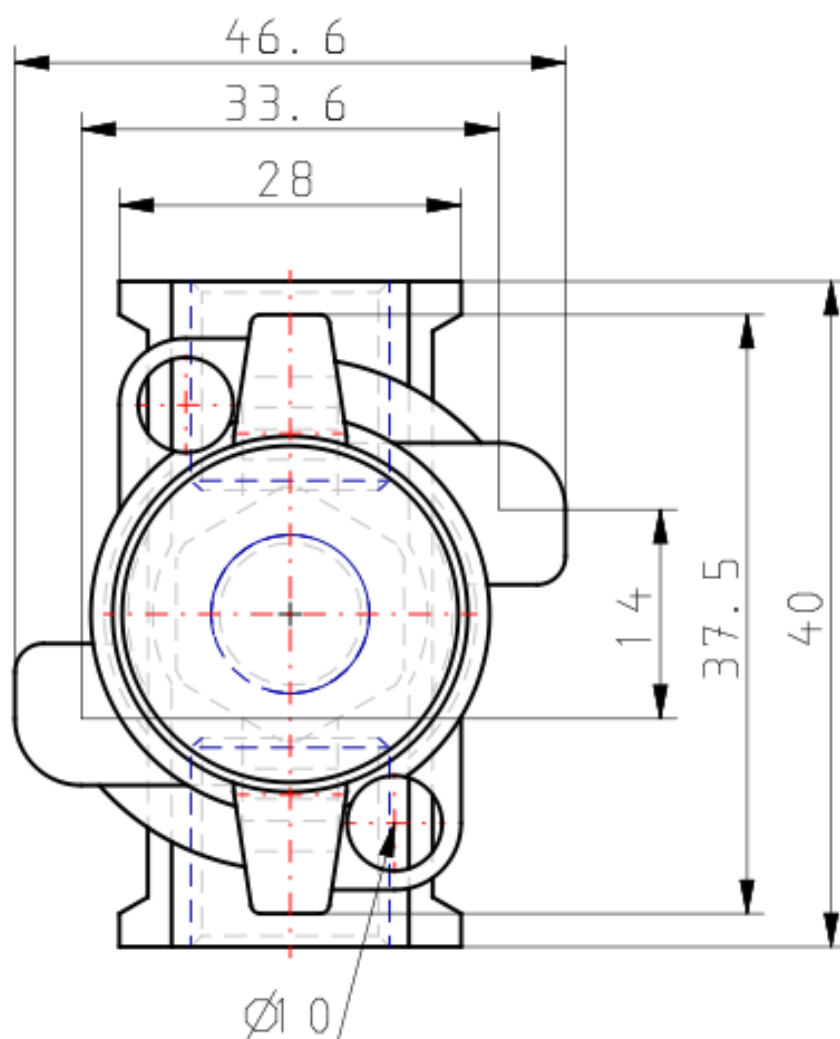

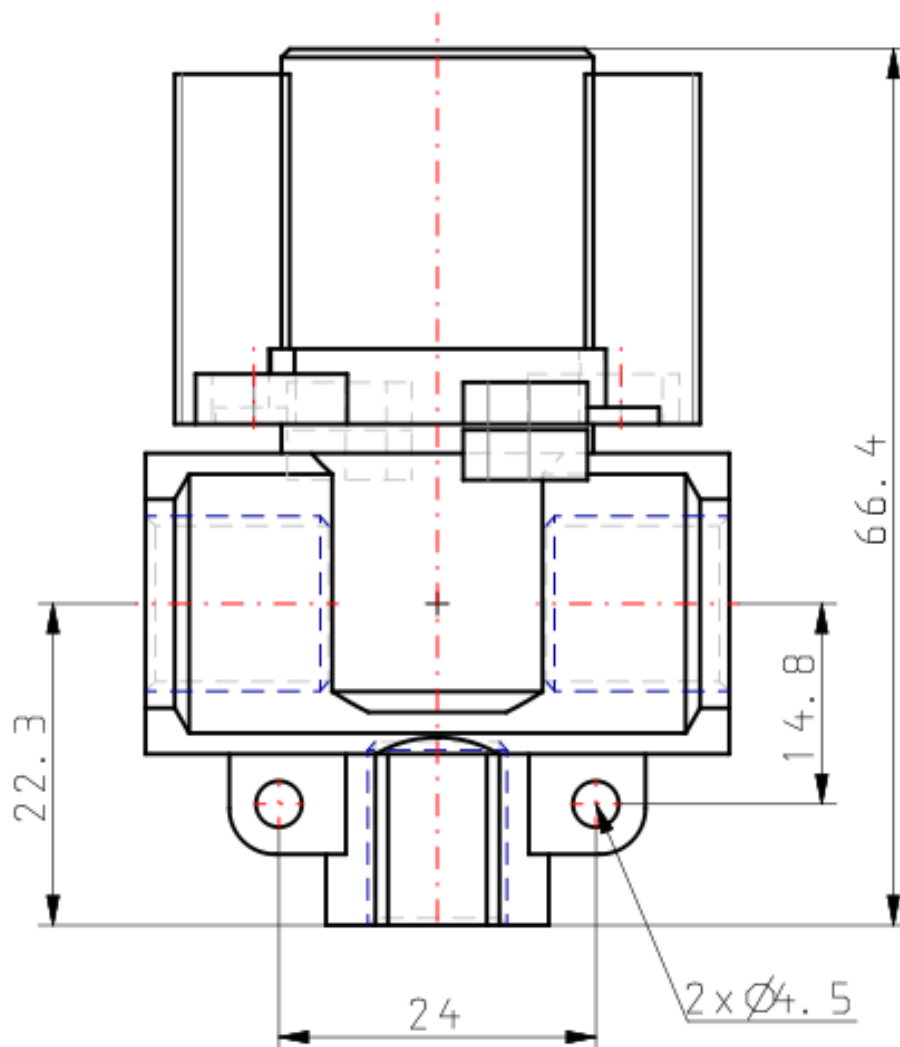

## Additional information

|                           |                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------|
| Catalogue                 | <a href="#">VHS-A_EU.pdf</a>                                                                |
| Declaration of conformity | <a href="#">new_DoC_VHS_TF122-178EN.pdf</a><br><a href="#">newDoc_VHS-A_TF1V403EN-A.pdf</a> |
| Operation manuals         | <a href="#">OM_VHS_OMQ0023EN-D.pdf</a>                                                      |