

ROTEX 100 Hub cast iron, bore 60 - KTR 021004006001


Item no. KTR-021004006001

Manufacturer KTR

Coupling hub for the ROTEX 100 jaw coupling in cast iron, finish-bored to 60 mm. Mounts on the shaft and transmits torque through the spider.

TECHNICAL DATA

Bore (mm)	60.000000
Country of Manufacture	Germany
Material	Grey cast iron (GG)
Norm	DIN 6885-1
Series	ROTEX
Weight	21.05 kg
Zolltarifnummer	84839089

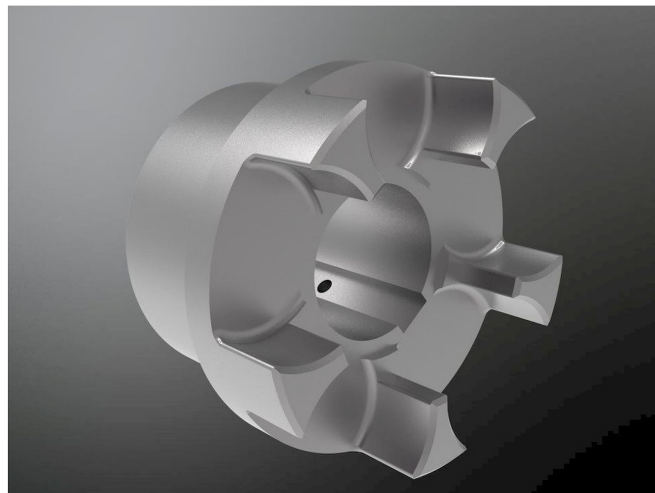

STANDARDS & COMPLIANCE

DIN 6885

DESCRIPTION

ROTEX is a torsionally flexible jaw coupling from KTR. It transmits torque positively through an elastomer spider between two jaw hubs and compensates angular, radial and axial shaft misalignment. If the spider wears, the jaws engage with each other so the coupling stays fail-safe.

BENEFITS

- Sturdy hub for durable torque transmission
- Prepared ready to fit
- Combines with any ROTEX 100 spider

TECHNICAL DATA

- Size: ROTEX 100
- Material: cast iron
- Bore: 60 mm
- Keyway: DIN 6885/1

A1-ESD equipment

Keldersstr. 15
42697 Solingen, Deutschland
VAT ID: DE269659389

Phone: +49 212 38340680
shop@esd-equipment.com
fluidics-equipment.com

Page 1/2

APPLICATIONS

A complete coupling needs two hubs and one spider of size 100.