

Serie AV05 R422103006 AV05-3/2CC-VT00-024VDC-LOC - Aventics 2x3/2-Wegeventil,


Item no. AVE-R422103006

Manufacturer Aventics

Serie AV05 R422103006 AV05-3/2CC-VT00-024VDC-LOC. Aventics pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Country of Manufacture	Germany
Weight	0.075 kg
Zolltarifnummer	84812090

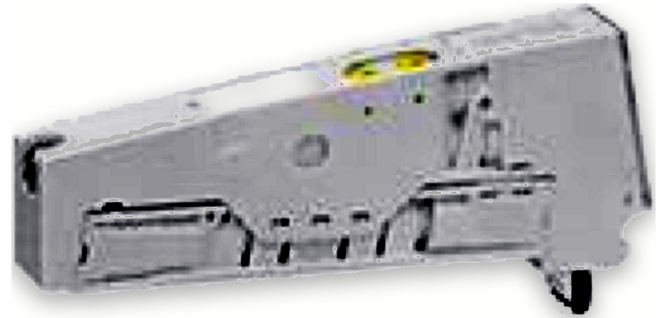

DESCRIPTION

Aventics pneumatic component for industrial automation and compressed-air applications in proven quality.

TECHNICAL DATA

Actuation	elektrisch
NennFlow Qn	650 l/min
Schaltprinzip	2x3/2
Ausführung	NC/NC
BetriebsPressure min.	-0.9 bar
BetriebsPressure max.	10 bar
BetriebsVoltage DC	24 V
Voltagestoleranz DC	-10% / +10%
HandhilfsActuation	rastend
Actuationsfunktion	beidseitig betätigt
Dichtprinzip	weich dichtend
Vorsteuerung	extern
Design Ventil	Schieberventil, überschneidungsfrei

Portart	Plattenanschluss
Verblockungsprinzip	Grundplattenprinzip mehrfach
SteuerPressure min.	3 bar
SteuerPressure max.	8 bar
UmgebungsTemperature min.	-10 °C
UmgebungsTemperature max.	60 °C
MediumsTemperature min.	-10 °C
MediumsTemperature max.	60 °C
Medium	Druckluft
Max. Partikelgröße	40 µm
Ölgehalt der Pressureluft min.	0 mg/m ³
Ölgehalt der Pressureluft max.	5 mg/m ³

VERSION

Serie AV05 R422103006 AV05-3/2CC-VT00-024VDC-LOC.

MANUFACTURER

Genuine Aventics.